



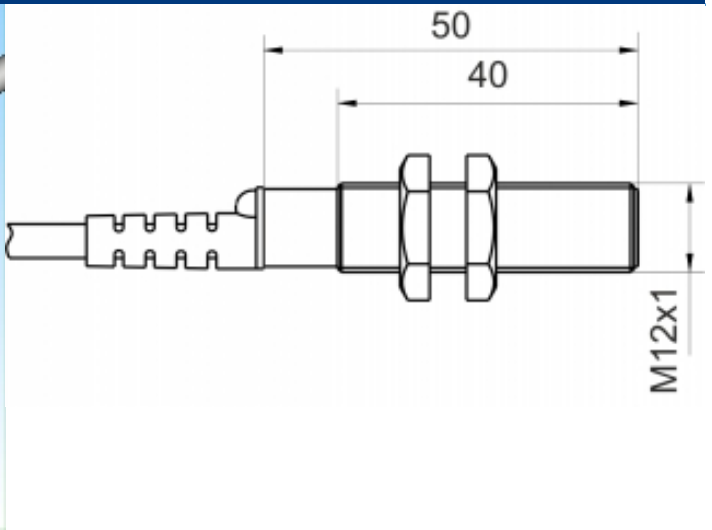


[Article Page](#)


**Product Description**

**inductive sensor analogue**

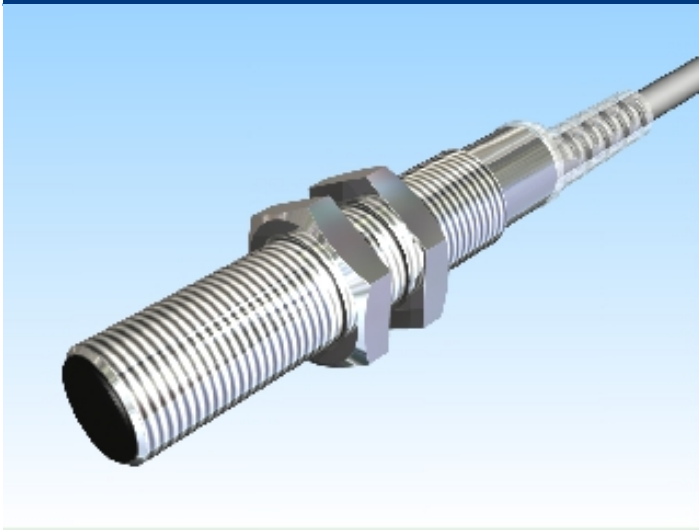

Name	KJ3-M12MB50-ANU
Order number	08317143800
Switching distance	3 mm
Mounting	 shielded
Switch type	 analog
Signal Type	Analog Voltage
Connection	 Cable

Connection diagramm

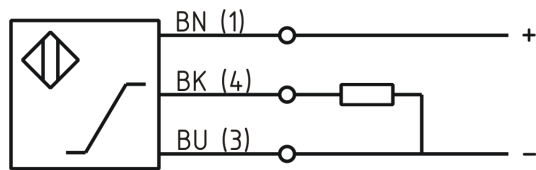

Dimension (in mm)	fine-pitch thread M12 x 50
-------------------	----------------------------

**Technical Specification**

Special features	Output Voltage 1 ... 9 V
Operating voltage	11 - 35 VDC
Max. ripple	≤ 10 %
No load current	≤ 5 mA
Switching frequency	500 Hz
Operating temperature	-25 ° C to 70 ° C
Temperature drift	+/-5 %
Repeat accuracy	≤ 1 %
Linearity	≤ 5 %

Time delay	300 ms
Reverse voltage protection	yes
Protection category	IP67
EMC-level	DIN EN 60947-5-7:2004-06
Housing material	Brass, nickel plated
Material active face	PCB
Cable length	2 m
Utilisation category	DC 13
Cable material	PVC LIYY grau (grey)
Nominal operating voltage	24 V DC
Cable cross	3x0.34 mm <sup>2</sup>
FIT / MTTF ac.. to SIEMENS 29500	88,64 / 1288y

**Errors and omissions exceptet**